U.S. Department of Energy

Rocky Flats Environmental Technology Site

Information Exchange

FIRST QUARTER 2005



This is a numerical summary of environmental surveillance measurements performed by the Department during the past quarter.




TABLE OF CONTENTS

INTRODUCTION		1
Air Monitoring Stat	tions -	2
Water Monitoring	Stations -	3
DECISION RULES	5	4
ANALYTES OF IN	TEREST	8
AIR and WATER S	STANDARDS	
National An	nbient Air Quality Standards	10
	later Quality Control Commission Standards ctive Materials at and around RFETS	11
Sampling and Ana	llytical Results for this Quarter	
AIR RESUL	_TS	
Desc	cription of Air Sampling this Quarter	14
Grap	ohs of Selected Air Results	15
Tabu	ılar Data	
	Table A Gross Alpha and Gross Beta Radioactivity Suspended Airborne Particulate Material	16
	Table B Alpha Spectrometric Analysis and Long-Lived Gross Alpha Radioactivity Concentrations in Suspended Airborne Particulate Material	17

WATER RESULTS

	Description of Precipitation and Surface Water Sampling Done This Quarter	21
	Graphs of Selected Water Results	24
	Tabular Data	
	Table G1 CDPHE Surface Water Monitoring Program Table H Inorganic Analysis of Surface Water Table I Organic Analysis of Surface Water	G1 H1 I1
GLOSSARY		26


Introduction

The purpose of this Environmental Surveillance Report (ESR) is to provide a quarterly update on Colorado Department of Public Health and Environment (CDPHE) air and surface water monitoring data at the Rocky Flats Environmental Technology Site (RFETS).

CDPHE currently has three Divisions that conduct monitoring at RFETS including the Air Pollution Control Division (APCD), the Hazardous Materials Waste Management Division, and the Laboratory Services Division (LSD). APCD monitors air for meteorological conditions. The Hazardous Materials Waste Management Division conducts surface water monitoring for many parameters, including metals, inorganics and radionuclides. The Laboratory Services Division performs radiological monitoring in air.


Under normal conditions, groundwater and soils are not monitored by Colorado Department of Public Health and Environment (CDPHE), but are monitored by DOE.

Sampling and data analysis is performed by CDPHE according to the Rocky Flats Integrated Monitoring Plan (IMP), which describes not only the monitoring done by CDPHE, but also that done by the Site and surrounding communities. It is possible that CDPHE may do some additional sampling as part of a special study or for some unusual circumstances. This report describes the results of both types of CDPHE monitoring.




BACKGROUND INFORMATION


MONITORING STATIONS DECISION RULES ANALYTES OF INTEREST AIR STANDARDS WATER STANDARDS




Colorado Department of Public Health and Environment Air Monitoring Locations 2002

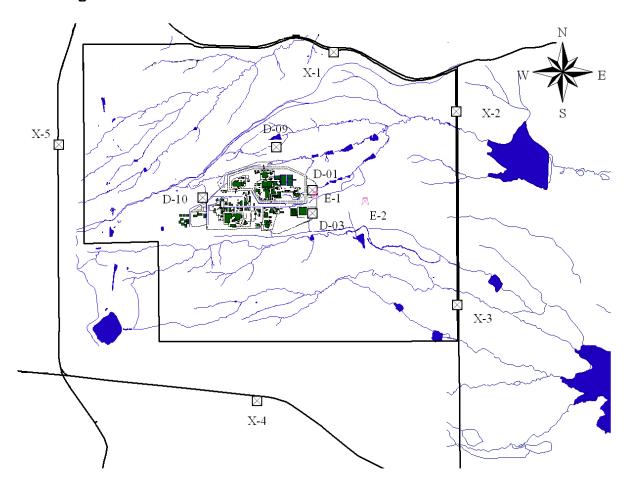






Colorado Department of Public Health and Environment Surface Water Monitoring 2001/2002

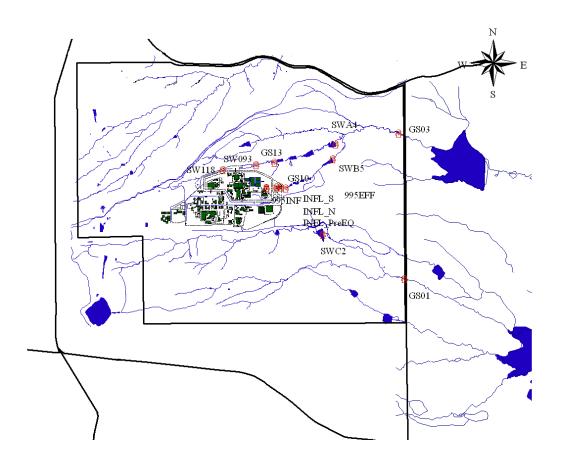





Decision Rules

The data acquired for each quarter is examined using standard methods of evaluation that are described in the Integrated Monitoring Plan (IMP). The methods use a series of decision rules to effectively analyze the data that has been collected, and make determinations about what actions need to be taken. Decision rules are if-then statements pertaining to data quality objectives. The decision rules define, quantitatively and qualitatively, the point at which a decision should be made or action should be taken.

The decisions could involve many different actions including, but not limited to, further analysis of data, implementation of new monitoring stations for source detection, management decisions, or evaluation of remediation alternatives. Any exceedence of an action level for a surface water or air contaminant during the quarter are summarized in this report, along with any actions taken or follow up investigations that are required.

The primary decision rules that pertain to each media are outlined below:

A. Air Monitoring

1. <u>Ambient Air Quality Monitoring</u>: Nitrogen Dioxide (NO₂), Ozone (O₃) and particulate monitoring is performed by APCD. Particulate monitoring includes monitoring of both fine particulates (PM₁₀) and total suspended solids (TSP).

IF: A perimeter monitor detects an NO₂ (annual arithmetic mean) concentration of

0.053 parts per million (ppm), an O_3 (1 hr av. time) concentration of 0.12 ppm, a TSP measurement of 75 micrograms per cubic meter ($\mu g/m^3$) averaged over a 1

year time period or 150 µg/m³ over a 24-hour time period, or a PM₁₀

concentration of 50 μg/m³ annually or 150 μg/m³ in a 24-hour period (Include

these values in a table in the report, too confusing this way)

THEN: The Site's operating permit may potentially be revised to mitigate the

exceedence.

2. Beryllium (Be) Monitoring: Emission points (stacks) are monitored for Be.

IF: Be emissions from a source exceed 10 g in a 24-hour period

THEN: CDPHE may take enforcement action.

IF: Ambient Be concentrations at monitoring sites exceed 0.01 µg/m³ over a 30-day

Period

THEN: CDPHE may take action to identify the source.

3. <u>Volatile Organic Compound (VOCs) Monitoring</u>: Various VOC monitoring stations exist around the perimeter of the site and are maintained by APCD. It is possible that remediation processes could release significant levels of VOCs. VOC data does not tend to vary and the measured concentrations are generally very low. A significant increase from normal levels of any VOC at any monitoring site could indicate a potential problem.

IF: A measured value of any VOC exceeds trends in historical data

THEN: An investigation will be enacted to determine the source of the elevated VOC

concentration.

4. <u>Radiological Ambient Air Quality Monitoring</u>: LSD air sampling locations are monitored for radiological contaminants and total suspended particulates (TSP).

IF: Measured values of radionuclides exceed typical trends existing in historical

data

THEN: Any number of actions may be taken including, but not limited to, analysis of

samples for verification, comparison of samples from nearest DOE monitoring sites, ComRad Program samplers, and/or APCD monitoring sites, request for investigation or explanation of elevated results from DOE, calculation of public

dose/risk and/or a presentation to CDPHE management.

B. Surface Water Monitoring

1. <u>Pond Predischarge Monitoring</u>: Analytes of Interest (AoIs) and some VOCs are monitored in the ponds previous to pond discharge so that discharge will not result in exceedence of stream standards.

IF: Predischarge monitoring indicates apparent exceedence of stream standards

THEN: CDPHE will notify the Site of additional AoIs for that discharge.

AND: The Site would then perform flow-paced POC monitoring for the additional

AoIs during that discharge, as part of the Segment 4 compliance monitoring.

OR

The Site may evaluate alternative water management options, which avoid immediate discharge including, but not limited to, treatment, storage or disposal.

2. Wastewater Treatment Plant (WWTP) Influent Radiological and Metals Monitoring: The Site has made an effort to eliminate any possible connections between waste streams containing radionuclides and WWTP influent. Therefore, it is assumed that radiologic loads will not significantly increase from baseline values. Radiologic parameters include total plutonium, total americium, total uranium, tritium, as well as alpha and beta activity. Metals parameters include for the total recoverable fraction - arsenic, beryllium, cadmium, chromium (total), iron, lithium, and thallium; plus special metals (total recoverable fraction) – silver, copper, manganese, nickel and selenium. Decontamination and decommissioning (D&D) activities

could potentially introduce radiologic loads to WWTP influent. The influent is monitored to track sources of contaminants that may be introduced during the cleanup process, through evaluation of pollutant loads and concentrations coming through the WWTP collection system.

IF: Influent loading for any of the radiologic parameters exceeds baseline

values determined from historical data

THEN: Evaluation will be performed to determine the source of contamination.

3. Performance Monitoring: Performance monitoring is conducted where specific D&D operations or remedial action pose a concern for a specific contaminant release that could impact surface water or groundwater. Performance monitoring is integrated with groundwater investigations and conducted to improve monitoring network resolution to isolate impacts of individual projects. CDPHE conducts performance monitoring in association with the Mound and East Trenches groundwater plume and treatment system, and Solar Pond Plume Treatment System.

a. Mound and East Trenches – VOC and metal contamination are present in the area of the Mound and East Trenches plume (south of South Walnut Creek). In order to ensure that stream standards are being attained, monitoring for VOCs and selected metals will be conducted in South Walnut Creek in the immediate vicinity where the groundwater contaminant plumes may be intersecting the stream.

IF: VOC or metal concentrations exceed stream standards

THEN: The monitoring frequency and number of sampling locations may be increased.

ELSE: VOC monitoring will be discontinued after three years and metals concentrations will be reviewed using the following Decision Rule.

IF: Metals concentrations are lower than stream standards, but significantly higher than the concentrations found at other RFETs locations.

THEN: Further investigation of in-stream concentrations and the cause of unusually high concentrations will be considered.

ELSE: Metals monitoring may be discontinued after a period of three years.

b. <u>Solar Pond Plume Treatment System</u> – The Solar Ponds groundwater contaminant plume contains elevated concentrations of nitrate, uranium and chloride, as well as lower concentrations of several metals. A groundwater treatment system has been installed, monitoring is being conducted to ensure that stream standards are being attained. The Site collects nitrate and uranium parameters. CDPHE collects metals and nitrate (as part of the *Ad Hoc* Nitrate Study).

IF: Metals or nitrate concentrations exceed stream standards.

THEN: The monitoring frequency and number of sampling locations may be

increased.

ELSE: Metals and nitrate monitoring will be continued until it has been demonstrated that metals concentrations at the most down gradient portion of the Solar Pond Plume are declining.

- 4. <u>Ad Hoc Program:</u> Ad Hoc Monitoring may be requested by DOE or the stakeholders to collect specific information related to special projects or to support decision-making processes. CDPHE has taken the responsibility for an evaluation of nitrate loading on Walnut Creek, and man-made versus natural uranium by inductively coupled plasma/mass spectrometry (ICP/MS) methodology.
 - a. <u>Nitrate Loading</u> Nitrate from the Solar Pond Groundwater Plume and treated effluent from the on-site Sewage Treatment Plant pose potential impact to surface water in the Walnut Creek Drainage and pond system. To supplement in-place continuous performance monitoring, for more accurate evaluation of nitrate loading, CDPHE is conducting additional water quality monitoring, consisting of grab samples for nitrate and ammonia analysis.

IF: No upward trend or high variability is detected.

THEN: Monitoring will continue on a quarterly basis.

ELSE Monitoring frequency may change.

b. <u>Uranium ICP/MS</u> – Conducted to augment the ICP/MS evaluation of groundwater at RFETs. The Uranium ICP/MS study has been undertaken to evaluate where man-made uranium isotopes are present in groundwater versus natural uranium in groundwater. The Site is supporting CDPHE in the collection of samples and analysis by ICP/MS.

IF: Sample results indicate non-natural uranium,

THEN: Evaluate potential sources of non-natural uranium and whether loading from that source may change over time.

5. <u>Stream Segment 4, Non-POC Monitoring</u> – POC monitoring will be supplemented to assess the effect of reduced flows and reduced nutrient loading to the Walnut Creek drainage as a result of the Sites' closure process. Monitoring for select metals will be conducted to ensure that stream standards are attained. To assist with the assessment of loading inorganics, nutrients (nitrate and ammonia) and physical parameters (pH, dissolved oxygen, hardness, total suspended solids) are also collected.

IF: Concentrations or loadings of specified contaminants exceed their 95% upper tolerance levels (UTLs)

THEN: CDPHE will notify the Site and the Cities, and RFETS may propose a change in ambient standards.

		A	analytes o	of Interest
Analytes		Air	Water	Purpose of Monitoring
Radionuclide	Pu	X	X	High level of public concern. Known carcinogen. Known past releases (within the past 8 years) have exceeded RFCA stream standards and action levels. This provides reasonable cause to expect future releases in excess of RFCA Action Levels.
	U	X	X	Known renal toxicity. Past exceedances provide reasonable cause to expect future releases in excess of RFCA stream standards and action levels.
	Am	X	X	Known carcinogen. Known past exceedances provide reasonable cause to expect future releases in excess of RFCA stream standards and action levels.
Metals	Be	X	X	Known to cause berylliosis in susceptible individuals when exposed in inhalation. May also cause contact dermatitis. Will be monitored as an indicator of releases from process and waste storage areas.
	Cr		X	Physiological and dermal toxicity. High level of regulatory concern due, in part to the chromic acid of incident of 1989. Low levels can cause significant ecological damage.
	Ag		X	Highly toxic to fish at low levels, if chronic. State of Colorado has temporarily removed its stream standard for silver, while under study. The study has been completed, and the standard will be reinstated at the next triennial review of South Platte stream standards, if not before. Used at RFETS only for photographic development. Routinely accepted by POTWs as municipal waste, but discharge is regulated. May be removed from this list later if data do not support concern.
	Cd		X	Highly toxic to fish at low levels, if chronic. Known human carcinogen (prostate cancer) and depletes physiologic calcium. Used at RFETS in plating processes. Monitoring data for the Interceptor Trench System (ITS) and the proposed discharge of untreated ITS waters into Walnut Creek provide reasonable cause to expect future releases in excess of RFCA Action Levels
	Hardness		X	Required to evaluate metals analyses, due to its effect on solubility to these metals.
Particulates	Total suspended particulates	X		Monitored to provide information on total airborne particulate levels. Filters also used for metals and radionuclides analyses.

	Analytes of Interest							
Analytes	Air	Water	Purpose of Monitoring					
	PM ₁₀ particulates	X		Monitored to provide information on fine airborne particulate levels. Filters also used for metals and radionuclides analyses.				
Volatile Organic Compounds	VOCs	X	X	A variety of volatile organic compounds, some of which are toxic to humans and ecology. Known discharges to air and water as well as groundwater infiltration.				
Real Time Monitoring of Physical and Indicator Parameters	PH		X	Toxicity to humans and ecology. Regulatory concern due to chromic acid incident. Real-time monitoring is an inexpensive and effective method of detecting acid spills such as (chromic acid or plutonium nitrate) or failure of treatment systems.				
(Note A)	Conductivity		X	Conductivity is an indicator of total dissolved solids, metals, anions, and pH. Real-time monitoring of conductivity is an inexpensive indicator of overall water quality.				
	NO ₃		X	Past releases near RFCA stream standards and action levels upstream of ponds provide reasonable cause to expect future releases in excess of RFCA stream standards and action levels. ITS discharges are often high in nitrate, and may challenge RFCA action levels.				
	Flow		X	Required to detect flow events, evaluate contaminant loads and plan pond operations and discharges. Affects nearly every decision rule, and is the most commonly discussed attribute of RFETS surface waters.				
	Oxides of Nitrogen	X		Monitored due to RFETS historical use of nitric acid.				
	Ozone	X		Monitored as part of the CDPHE network. Not required or part of monitoring for RFETS.				
	Wind speed	X		Monitored to provide emergency response modeling information.				
	Wind direction	X		Monitored to provide emergency response modeling information.				
	Temperature	X		Monitored to provide emergency response modeling information.				

Note A: These parameters provide real-time indication for a wide variety of regulated contaminants, and are also required component for monitoring for AoIs. They require no laboratory analysis and are the RFETS most cost effective defensive monitoring.

NATIONAL AMBIENT AIR QUALITY STANDARDS

POLLUTANT	AVERAGING TIME	STANDARD
Carbon Monoxide (CO)		
Primary Standard	1 Hour ^(a)	35 ppm
Primary Standard	8 Hour ^(a)	9 ppm
Ozone (O ₃)		
Primary and Secondary Standards (up to 1997)	1 Hour ^(b)	0.12 ppm
Primary and Secondary Standards (as of July 1997)	8 Hour ^(c)	0.08 ppm
Nitrogen Dioxide (NO ₂)		
Primary and Secondary Standards	Annual Arithmetic Mean	0.053 ppm
Sulfur Dioxide (SO ₂)		
Primary Standard	Annual Arithmetic Mean	0.030 ppm
Primary Standard	24 Hour ^(a)	0.14 ppm
Secondary Standard	3 Hour ^(a)	0.5 ppm
Particulates (PM ₁₀)		
Primary and Secondary Standards	Annual Arithmetic Mean (d)	50 μg/m ³
Primary and Secondary Standards	24 Hour (b) prior to July 1997, (e) as of July 1997	$150 \mu\text{g/m}^3$
Fine Particulates (PM _{2.5}) (as of July 1997)		
Primary and Secondary Standards	Annual Arithmetic Mean (d)	$15.0 \mu g/m^3$
Primary and Secondary Standards	24 Hour ^(f)	65 μg/m ³
Lead (Pb)		
Primary and Secondary Standards	Calendar Quarter Average	$1.5 \mu g/m^3$
Total Suspended Particulates (TSP)		
Primary Standard	Annual Geometric Mean (g)	$75 \mu g/m^3$
Primary Standard	24 Hour ^(g)	$260 \mu g/m^3$
Secondary Standard	Annual Geometric Mean (g)	$60 \mu \text{g/m}^3$
Secondary Standard	24 Hour ^(g)	$150 \mu g/m^3$

Not to be exceeded more than once per year.

⁽b) Statistically estimated number of days with concentrations above this level averaged over a three-year period, is not to be more than 1 per year.


The three-year average of the fourth maximum value for each year is not to exceed this level.

⁽d) The average of three years of annual averages (based on quarterly averages) is not to exceed this level.

⁽e) The three-year average of the 99th percentile for each year is not to exceed this level.

The three-year average of the 98th percentile for each year is not to exceed this level.

The TSP standard was replaced by the PM_{10} standard on July 1, 1987. TSP is now a State standard only and was temporarily suspended from 30 August 1993 to 30 October 1995 by the AQCC.



Colorado Water Quality Control Commission Standards for Radioactive Materials at and around RFETS

	SEGMENT 2 Standley Lake	SEGMENT 3 Great Western Reservoir	SEGMENTS 4a and 5 Woman Creek	SEGMENTS 4a, 4b and 5 Walnut Creek
Gross Alpha (pCi/L)	6	5	7	11
Gross Beta (pCi/L)	9	12	8	19
Plutonium (pCi/L)	0.03	0.03	0.15*	0.15 *
Americium (pCi/L)	0.03	0.03	0.15*	0.15 *
Tritium (pCi/L)	500	500	500	500
Uranium (pCi/L)	3	4	11	10

^{*} The modification is a narrative standard requiring that the concentration of americium and plutonium be consistent with attaining the numerical water quality standard in Segment 4(b) of Big Dry Creek

Standards for Inorganics and Metals

	SEGMENTS 4a & 4b	SEGMENT 5
Inorganic/Metal	Standards (μg/L)	Action Levels (μg/L)
Ammonia	*	*
Beryllium, total recoverable	4	4
Cadmium, dissolved **	1.5	1.5
Cadmium, Total recoverable	5	-
Chloride	250,000	250,000
Chromium (VI), dissolved**	11	11
Copper, dissolved**	16	16
Iron, dissolved	300	-
Iron, total recoverable	1000	1000
Manganese, dissolved**	50	1000
Manganese, total recoverable	200	-
Nitrate	10,000	100,000 ™
Nitrite	500	4500 ™
Phosphate, ortho	-	-
Phosphate, total	-	-
Selenium, dissolved**	5	5
Silver, dissolved**	0.59	0.59
Sulfate	250,000	250,000
Sulfide	2	2

^{*}There is no unionized ammonia standard for Segment 5 or Segment 4b. A standard of 0.1 mg/L applies to Segment 4a.

^{**}The standards for these metals were calculated using a formula based on hardness. A hardness value of 143 mg/L was used because this is the average hardness found in these waters.

TM - Temporary Modification

EPA Method 524.2 for VOCs in Surface Waters


VOCs	MCL (μg/L)	MDL (μg/L)	PQL (μg/L)	VOCs	MCL (μg/L)	MDL (μg/L)	PQL (μg/L)
1,1,2-Tetrachloroethane	none	0.5	0.5	Chloroform	5.7	0.5	0.5
1,1,1-Trichloroethane	200	0.5	0.5	Chloromethane	none	0.5	0.5
1,1,2,2-Tetrachloroethan	0.18	0.5	0.5	Dibromochloromethane	none	0.5	0.5
1,1,2-Trichloroethane	3	0.5	0.5	Dibromomethane	none	0.5	0.5
1,1-Dichlorethane	none	0.5	0.5	Dichlorodifuoromethane	none	0.5	0.5
1,1-Dichlorethene	7	0.5	0.5	Ethylbenzene	700	0.5	0.5
1,1-Dichloropropene	none	0.5	0.5	Fluorotrichloromethane	none	0.5	0.5
1,2,3-Trichlorobenzene	none	0.5	0.5	Hexachlorobutadiene	14	0.5	0.5
1,2,3-Trichloropropane	none	0.5	0.5	Isopropylbenzene	none	0.5	0.5
1,2,4-Trichlorobenzene	70	0.5	0.5	Naphthalene	28	0.5	0.5
1,2,4-Trimethylbenzene	none	0.5	0.5	Propylbenzene	none	0.5	0.5
1,2-Dichlorobenzene	600	0.5	0.5	Styrene	100	0.5	0.5
1,2-Dichloroethane	0.38	0.5	0.5	Tetrachloroethene	5	0.5	0.5
1,2-Dichloropropane	0.52	0.5	0.5	Toluene	1000	0.5	0.5
1,3,5-Trimethylbenzene	none	0.5	0.5	Trichloroethene	5	0.5	0.5
1,3-Dichlorobenzene	600	0.5	0.5	Vinyl chloride	2	0.5	0.5
1,3-Dichloropropane	none	0.5	0.5	Xylene, (total)	10,000	0.5	0.5
1,4-Dichlorobenzene	75	0.5	0.5	cis-1,2-Dichlroethene	70	0.5	0.5
2,2-Dichloropropane	none	0.5	0.5	cis-1,3-Dichloropropene	none	0.5	0.5
2-Chlorotoluene	none	0.5	0.5	n-Butylbenzene	none	0.5	0.5
4-Chlorotoluene	none	0.5	0.5	sec-Butylbenzene	none	0.5	0.5
4-Isopropyltoluene	none	0.5	0.5	tert-Butylbenzene	none	0.5	0.5
Benzene	1.2	0.5	0.5	trans-1,2-Dichloroethene	100	0.5	0.5
Bromobenzene	none	0.5	0.5	trans-1,3-Dichloroethene	none	0.5	0.5
Chloroethane	none	0.5	0.5	Methylene Chloride	4.7	0.5	0.5
Bromodichloromethane	0.56	0.5	0.5				
Bromoform	4.3	0.5	0.5				
Carbon Tetrachloride	0.27	0.5	0.5				
Clorobenzene	100	0.5	0.5				
Chloroethane	none	0.5	0.5				
1,1-Dichloropropene	none	0.5	0.5				


EPA Method 515.1 for Chlorinated Acid Herbicides

Contaminant	MDL (µg/L)	PQL (µg/L)	Contaminant	MDL (µg/L)	PQL (µg/L)
Acifluorfen	0.3	3	3,5-Dichlorobenzoic acid	0.8	8
Bentazon	0.4	4	Dichlorprop	0.3	3
Cloramben	1.2	12	Dinoseb	0.6	6
2,4-D	0.3	3	4-Nitrophenol	0.8	8
Dalapon	0.7	7	Pentachlorophenol	0.6	6
2,4-DB	0.5	5	Picloram	0.5	5
DCPA	0.4	4	2,4,5-T	0.3	3
Dicamba	0.3	3	2,4,5-TP	0.3	3

EPA Method 525.2 for SVOCs in Surface Waters

SVOCs	MCL (μg/L)	MDL (µg/L)	PQL (µg/L)	SVOCs	MCL (μg/L)	MDL (µg/L)	PQL (µg/L)
1,2,4-Ttichlorobenzene	none	5	10	Benzo(a)anthracene	none	5	10
1,2-Dichlorobenzene	none	5	10	Benzo(a)anthracene	0.2	5	10
1,3-Dichlorobenzene	none	5	10	Benzo(b)fluoranthene	none	5	10
1,4-Dichlorobenzene	none	5	10	Benzo(ghi)perylene	none	5	10
2,4,5-Trichlorophenol	none	5	10	Benzo(k)fluoranthene	none	5	10
2,4,6-Trichlorophenol	none	5	10	Butyl benzyl phthalate	none	5	10
2,4-Dichlorophenol	none	5	10	Chrysene	none	5	10
2,4-Dimethylphenol	none	5	10	Di-n-butylphthalate	none	5	10
2,4-Dinitrophenol	none	25	10	Di-n-octylphthalate	none	5	10
2,4-Dinitroroluene	none	5	10	Dibenz(a,h)anthracene	none	5	10
2-Chloronaphthalene	none	5	10	Dibenzofuran	none	5	10
2-Methyl-4,6-dinitrophenol	none	25	50	Diethyl phthalate	none	5	10
2-Chlorophenol	none	5	10	Dimethyl phthalate	none	5	10
2-Methylnaphthalene	none	5	10	Hexachlorobutadine	none	5	10
2-Methylphenol	none	5	10	Hexachlorocyclopentadiene	50	5	10
2-Nitroaniline	none	5	10	Hexachloroethane	none	5	10
2-Nitrophenol	none	5	10	Indeno(1,2,3-cd)pyrene	none	5	10
3,3-Dichlorobenzidine	none	5	10	Isophorone	none	5	10
3-Nitroaniline	none	25	50	N-Nitosodi-n-propylamine	none	5	10
4-Bromophenylphenylether	none	5	10	N-Nitrosodiphenylamine	none	5	10
4-Chloro-3-methylphenol	none	10	20	Naphthalene	none	5	10
4-Chloroaniline	none	10	20	Nitrobenzene	none	5	10
4-Chlorophenylphenylether	none	5	10	Pentachlorophenol	1	25	10
4-Methylphenol	none	5	10	Phenanthrene	none	5	10
4-Nitoraniline	none	25	50	Phenol	none	5	10
4-Nitrophenol	none	25	50	Pyrene	none	5	10
Acenaphthene	none	5	10	bis(2-Chloroethoxy)methane	none	5	10
Acenaphthylene	none	5	10	bis(2-Chloroethyl) ether	none	5	10
Anthracene	none	5	10	bis(2-Ethylhexyl) phthalate	6	5	10







SUMMARY AND OVERVIEW For FIRST QUARTER 2005

Laboratory Services Division


AIR MONITORING:

Table A contains the complete gross alpha /gross beta results for the first quarter 2005. These data show an unusually high result for the gross alpha result at the D1 sampler on Mar 8th. Alpha spectrometric analysis of the sample for that week was completed in May, and the results are included in this month's report.

Alpha spectrometric data for the third and fourth quarters of 2004 and the first quarter of 2005 are also complete and included in this report. The high plutonium and uranium results for the D1 composite sample are explained by the results of the March 8th sample.

2. Graphical Presentation

Graphs of pertinent and abnormal data from air monitoring are presented in this section.

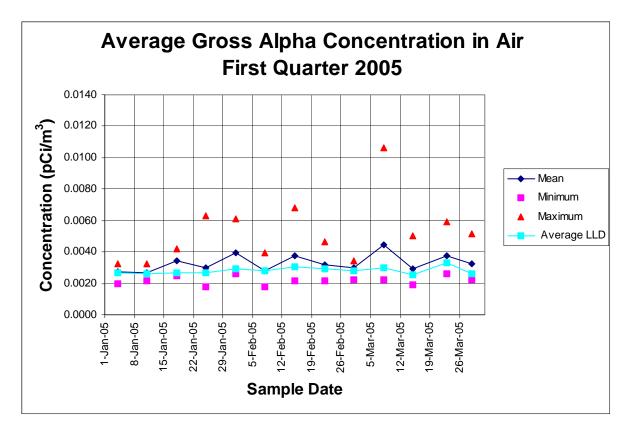

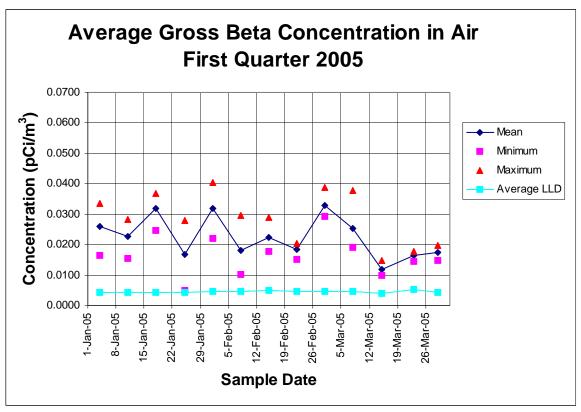


TABLE A: GROSS ALPHA AND GROSS BETA RADIOACTIVITY CONCENTRATIONS IN SUSPENDED AIRBORNE PARTICULATE MATERIAL

FIRST QUARTER 2005

			Gross Alpha					Gross Beta		
Location	Sampler Type	Number of Samples		Mean pCi/m³	Max pCi/m³	Min pCi/m³	Mean pCi/m³	Max pCi/m³	Min pCi/m³	
INDUSTRIAL										
AREA SAMPLERS										
D-1	TSP	12	<	0.0052	0.0106	0.0025	0.0278	0.0404	0.0147	
E-1-T	TSP	5	<	0.0022	0.0037	0.0012	0.0258	0.0351	0.0151	
BUFFER ZONE										
SAMPLERS										
D-10	TSP	4	<	0.0021	0.0041	0.0001	0.0200	0.0248	0.0154	
D-15	TSP	11	<	0.0029	0.0042	0.0018	0.0255	0.0389	0.0111	
E-2-T	TSP	4	<	0.0021	0.0039	0.0009	0.0271	0.0335	0.0171	
SITE BOUNDARY										
SAMPLERS										
X-1	TSP	13	<	0.0016	0.0034	0.0007	0.0188	0.0311	0.0125	
X-2	TSP	12	<	0.0023	0.0042	0.0004	0.0235	0.0352	0.0121	
X-3	TSP	10	<	0.0023	0.0041	0.0004	0.0186	0.0364	0.0049	
X-4	TSP	10	<	0.0025	0.0042	0.0015	0.0245	0.0352	0.0173	
X-5	TSP	10	<	0.0022	0.0039	0.0007	0.0219	0.0354	0.0098	

TSP = Total Suspended Particulates

PM10 = Particulate Material < 10 microns in diameter

TABLE B: ALPHA SPECTROMECTRIC ANALYSIS AND LONG-LIVED GROSS ALPHA RADIOACTIVITY CONCENTRATIONS IN SUSPENDED AIRBORNE PARTICULATE MATERIAL

THIRD QUARTER 2004

								Mean
LOCATION	SAMPLER TYPE	239+240Pu pCi/M ³	²⁴¹ Am pCi/M ³	239+240Pu/ ²⁴¹ Am Ratio	234U pCi/M ³	235U pCi/M ³	238U pCi/M ³	Gross Alpha pCi/M ³
	TIFE	•	•	Kano	pCI/NI	pCI/IVI	pCI/NI	pCI/IVI
D-1	TSP/Continuous	0.000019 <u>+</u> 0.000006	0.000010 <u>+</u> 0.000004	1.9 <u>+</u> 1.0	0.000039	< 0.000008	0.000043	< 0.0024
D-15	TSP/Continuous	0.000023 <u>+</u> 0.000006	< 0.000007		<0.000025	< 0.000005	<0.000028	< 0.0024
X-1	TSP/Continuous	< 0.000005	< 0.000004		0.000039	< 0.000006	<0.00028	< 0.0020
X-2	TSP/Continuous	< 0.000003	< 0.000003		<0.000031	< 0.000006	<0.000031	< 0.0025
X-3	TSP/Continuous	< 0.000003	0.000006 <u>+</u> 0.000003		0.000036	< 0.000007	< 0.000035	< 0.0019
X-4	TSP/Continuous	< 0.000003	0.000003 <u>+</u> 0.000002		0.000041	< 0.000006	0.000033	< 0.0026
X-5	TSP/Continuous	< 0.000004	< 0.000012		0.000046	< 0.000006	0.000037	< 0.0027

pCi/m³ = Picocuries per cubic meter TSP = Total Suspended Particulates

Continuous = continuous sampling

TABLE B: ALPHA SPECTROMECTRIC ANALYSIS AND LONG-LIVED GROSS ALPHA RADIOACTIVITY CONCENTRATIONS IN SUSPENDED AIRBORNE PARTICULATE MATERIAL

FOURTH QUARTER 2004

								Mean
LOCATION	SAMPLER	²³⁹⁺²⁴⁰ Pu	²⁴¹ Am	²³⁹⁺²⁴⁰ Pu/ ²⁴¹ Am	$^{234}\mathrm{U}$	²³⁵ U	²³⁸ U	Gross Alpha
	TYPE	pCi/M³	pCi/M ³	Ratio	pCi/M ³	pCi/M ³	pCi/M ³	pCi/M ³
D-1	TSP/Continuous	0.000020 ± 0.000005	0.000007 <u>+</u> 0.000003	2.9 <u>+</u> 1.4	< 0.000021	< 0.00004	0.000021	< 0.0032
D-15	TSP/Continuous	0.000008 <u>+</u> 0.000003	0.000004 <u>+</u> 0.000002	2.0 <u>+</u> 1.3	0.000037	< 0.000005	0.000044	< 0.0021
X-1	TSP/Continuous	< 0.00004	< 0.000002		0.000055	< 0.00004	0.000044	< 0.0015
X-2	TSP/Continuous	< 0.000003	< 0.000002		0.000059	< 0.000005	0.000047	< 0.0015
X-3	TSP/Continuous	< 0.000002	0.000002 <u>+</u> 0.000001		<0.000020	< 0.00004	<0.000021	< 0.0021
X-4	TSP/Continuous	< 0.000002	0.000003 <u>+</u> 0.000001		0.000025	< 0.000005	0.000025	< 0.0019
X-5	TSP/Continuous	< 0.000003	0.000003 <u>+</u> 0.000002		< 0.000027	< 0.000005	<0.00028	< 0.0024

p
i/m³ = Picocuries per cubic meter TSP = Total Suspended Particulates Continuous = continuous sampling

TABLE B: ALPHA SPECTROMECTRIC ANALYSIS AND LONG-LIVED GROSS ALPHA RADIOACTIVITY CONCENTRATIONS IN SUSPENDED AIRBORNE PARTICULATE MATERIAL

FIRST QUARTER 2005

								Mean
LOCATION	SAMPLER	²³⁹⁺²⁴⁰ Pu	²⁴¹ Am	239+240Pu/ ²⁴¹ Am	²³⁴ U	²³⁵ U	²³⁸ U	Gross Alpha
	TYPE	pCi/M ³	pCi/M ³	Ratio	pCi/M³	pCi/M ³	pCi/M³	pCi/M ³
D-1	TSP/Continuous	0.000083 <u>+</u> 0.000013	0.000015 <u>+</u> 0.000005	5.5 <u>+</u> 2.0	0.000097	0.000006	0.000160	< 0.0052
D-15	TSP/Continuous	$0.000010 \pm \\ 0.000004$	0.000007 <u>+</u> 0.000003	1.4 <u>+</u> 0.8	0.000058	0.000006	0.000035	< 0.0029
X-1	TSP/Continuous	< 0.000002	< 0.000002		< 0.000019	< 0.000004	0.000020	< 0.0016
X-2	TSP/Continuous	< 0.000003	0.000005 <u>+</u> 0.000002		< 0.000029	< 0.00006	0.000034	< 0.0023
X-3	TSP/Continuous	< 0.00004	< 0.000003		< 0.000027	< 0.000005	<0.000027	< 0.0023
X-4	TSP/Continuous	< 0.000005	0.000005 <u>+</u> 0.000002		< 0.000024	< 0.00005	0.000029	< 0.0025
X-5	TSP/Continuous	< 0.000005	< 0.000005		0.000045	< 0.000006	0.000050	< 0.0022


p i/m³ = Picocuries per cubic meter TSP = Total Suspended Particulates Continuous = continuous sampling


TABLE B: ALPHA SPECTROMECTRIC ANALYSIS AND LONG-LIVED GROSS ALPHA RADIOACTIVITY CONCENTRATIONS IN SUSPENDED AIRBORNE PARTICULATE MATERIAL

March 8, 2005

								Mean
LOCATION	SAMPLER	²³⁹⁺²⁴⁰ Pu	²⁴¹ Am	239+240Pu/ ²⁴¹ Am	²³⁴ U	²³⁵ U	²³⁸ U	Gross Alpha
	TYPE	pCi/M³	pCi/M ³	Ratio	pCi/M³	pCi/M ³	pCi/M ³	pCi/M ³
D-1	TSP/Continuous	0.000290 <u>+</u> 0.0	000470.000061		0.000203	< 0.000017	0.000414	0.0106 <u>+</u> 0.0043

p
i/m³ = Picocuries per cubic meter TSP = Total Suspended Particulates Continuous = continuous sampling







CDPHE Surface Water Sampling

First Quarter 2005

Surface water sampling conducted by CDPHE for the First Quarter 2005, included:

- Pre-discharge samples were collected from Pond B-5 on March 7, 2005. Ponds A-4 treated water was sampled on February 4, 2005 and March 11, 2005. Pond C-2 was not discharged this quarter.
- Nitrate and performance monitoring samples were taken from North and South Walnut Creek on March 30, 2005. Ponds B-1 and B2 were not sampled because the ponds were being excavated. A VOC sample was taken from GS-09. Nitrate samples were taken at SW-093, GS-13, A3, SW-001 and SW-114. Chloride samples were taken at SW-093, GS-13, A-3, SW-001, and SW-114. Metals samples were taken at GS-9, GS-13, SW-001, and SW-114. Post treatment samples from Pond A-4 were taken on February 4, 2005 for radioactive analysis, total recoverable metals, nitrate/nitrite, chloride, phosphate, and total suspended solids. Radioactive analysis samples from SW-093 were taken on March 30, 2005.

Table G provides a summary of the sample activity and parameters collected by CDPHE. Table H presents inorganic results and Table I presents VOC results.

Pre-Discharge Monitoring

The Pre-Discharge sampling program is conducted for compliance evaluation of the Site's ability to discharge storm water and treated wastewater to the Big Dry Creek drainage. Pre-Discharge Monitoring is conducted at the terminal ponds on Walnut Creek (Pond A4 and Pond B5). Typically the Walnut Creek Ponds A4 and B5 are discharged 8-10 times per years and Woman Creek Pond C2 once a year. Sampling is conducted by both the Site and CDPHE. Only the CDPHE results are presented in this document. Reference Table G for monitoring specifics.

The quarters' pre-discharge samples from Ponds B-5 showed concentration of americium-241 concentrations below established RFCA action levels or applicable WQCC stream standards. The Am-241 concentration was measured at 0.051 pCi/liter on March 7, 2005. The Pu-239/240 was measured less than 0.016 pCi/liter. Measured gross beta was 21 pCi/liter. The elevated reading is due to potassium.

Water from pond A-4 was treated for Am-241 and stored in pond A-3. Samples taken on February 4, 2005 showed concentrations of 0.147 pCi/liter Am-241, <0.022 pCi/liter Pu-239/240, <0.001 mg/liter uranium, <5 pCi/liter gross alpha, and 10 pCi/liter gross beta. The slightly elevated gross beta reading is due to potassium. Samples taken on March 11, 2005 for metals analysis showed no concentrations above action levels or applicable WQCC stream standards. VOC analysis showed low-level breakdown products of pond organics. The cyclotrisiloxane is from the analytical apparatus.

Point of Compliance - Surface Water Results

Point of Compliance monitoring is conducted below the terminal ponds and at the Site boundary along Indiana Street, on both Walnut and Woman Creek. Point of Compliance monitoring is conducted to evaluate Site compliance with WQCC stream standards and RFCA action levels, as appropriate. Point of Compliance monitoring activities are shared between CDPHE and the Site. Only the CDPHE monitoring results are presented in this document. Reference Table G for monitoring specifics.

Nutrient Sampling - North Walnut Creek

This *Ad Hoc* program conducted by CDPHE monitors nutrient concentrations related to nitrate and ammonia in the North and South Walnut Creek drainages as a result of Sewage Treatment Plant Operations and Solar Pond Groundwater Plume. The nitrate profile in the Walnut Creek drainages exhibits a pattern of elevated levels in excess of the underlying standard, since the time the French drain and active treatment system for the solar pond area was dismantled and discontinued, and the installation of the passive solar pond plume passive treatment project. Historically the highest exceedances are at GS-13, which more represent the full impact of the solar pond nitrate plume into North Walnut Creek.

These quarters' nitrate results ranged from <0.03 mg/L to 45 mg/L. All results were less than the temporary modification of 100 mg/L. The normal Colorado standard for nitrate is 10 mg/L.

These quarters' <u>total</u> ammonia results ranged from <0.03 mg/L to 0.08 mg/L. Calculating for unionized ammonia exhibited concentrations ranging from 0.0001 to 0.0015 mg/L, compared against the conservative unionized standard of 0.1 mg/L (segment 4a stream standard), no samples exceed the stream standard.

Performance Monitoring – Mound/East Trench Plume

The Mound and East Trenches groundwater contaminant plumes contain volatile organic compounds (VOCs) and select metals. Groundwater collection and treatment systems are in place and appear to be effective. However, it is possible that some contaminated groundwater either was down gradient of the collection systems before installation, or that some groundwater may be by-passing the collection trenches. There is no in-stream monitoring specified in the Decision Documents for these systems that can either verify or disprove this. In order to ensure that stream standards are being attained, monitoring for VOCs and selected metals was commenced during second quarter 2002 in South Walnut Creek in the immediate vicinity of where the groundwater contamination plumes may be intersecting the stream.

Water in Ponds B-1 and B-2 were not sampled this quarter because of excavation activities.


Performance Monitoring – Solar Pond Plume

The Solar Ponds groundwater contaminant plume contains high levels of nitrates and uranium, and lower concentrations of several other metals. Groundwater collection and treatment systems have been installed, and the treatment appears to be effective. However, it is possible that some contaminated


groundwater either was already down gradient of the collection system before it was installed, or, that some groundwater may be bypassing the collection trench.

While the Site monitors in-stream uranium concentrations, CDPHE will perform in-stream monitoring for metals. This data will be used in order to ensure that stream standards are being attained. It should be noted that both the Site and CDPHE monitor nitrate concentrations at this location, and the CDPHE nitrate monitoring is described in the ad-hoc section of this ESR.


Am-241 at a measured concentration of less than 0.011 pCi/liter was found at SW-093 in March 30, 2005 samples, and plutonium concentrations were non-detect. No exceedance of nitrate or metal surface water standards were found this quarter.






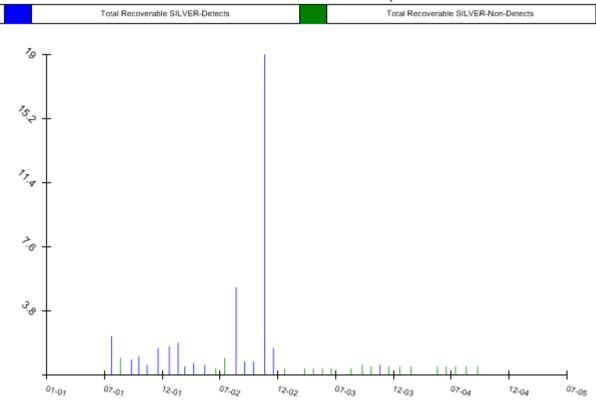



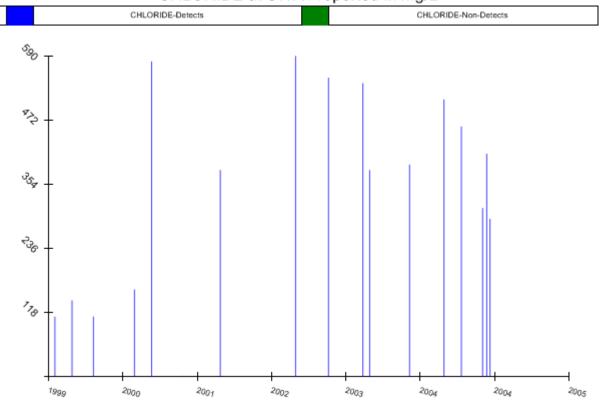

Total GROSS BETA at SWC2 reported in PCI/L

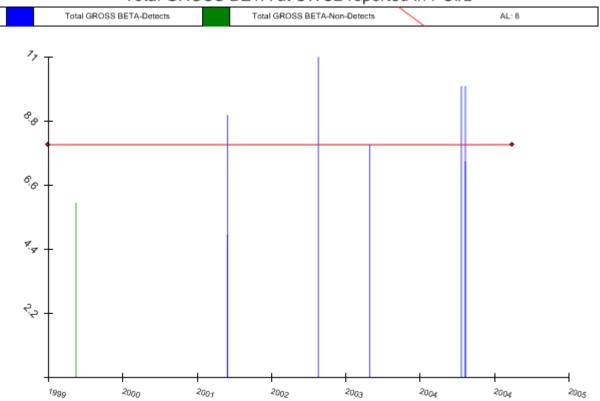



Sampling Freque Locations & Parameter or Me Method	& Paramethod		Pre Dis	scharge		ent Plant	Dorformono			1					
		Analyses	Pond A4		"""	luent	Performanc	e Monitoring	Ad Hoc Program					C Monitoring	at Indiana
		All Sites	or Pond B5	Pond C2	Following	: Bldg 990 N. & S. Interceptors Prior to Equalizatio n Basin	Plume (footnote a)		Nitrate Study 8 Stations (footnote b)	(foo	nd Releases etnote c)	Dry Weath No Pond	Release	Events - Relea	ng Storm No Pond ase ^d
			SWA4 or SWB5	SWC2	INFL	990 INFL_N 990 INFL_S	SWB1, SWB2, SWB3, GS09	GS13	various	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck
Field pH		na	Field pH ar		ature Will be	Collected for	All Samples								
Field Temp, C		na		nd Tempera	ature Will be	Collected for	All Samples								
Field DO		na	10/yr ¹	1/yr ¹											
RADS - Total (un	filtered	I). RUSH													
Americium - T	TRU SPEC	11	10/yr ¹	1/yr ¹											
	TRU	11	10/yr ¹	1/yr ¹											
	0.00	11	10/yr ¹	1/yr ¹											
Gross Beta 90	0.00	11	10/yr ¹	1/yr ¹											
RADS - Total (unfiltered)															
	RUSP	20			Monthly ²	Quarterly ¹									1
Plutonium - TR	EC RUSP EC	20			Monthly ²	Quarterly ¹									
Gross Alpha 90	0.00	20			Monthly ²	Quarterly ¹									
	0.00	20				Quarterly ¹									
Uranium, 90 Fluorometric	0.80	25	Quarterly ¹	1/yr¹	Monthly ²	Quarterly ¹									
Metals - Dissolve (filtered)	ed														
	8.00		Quarterly ¹				Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹	2 / yr¹	2 / yr ¹	2 / yr ¹	2 / yr ¹
	8.00.			1/yr ¹			Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr ¹	2 / yr ¹
	200.7			1/yr ¹			Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr ¹	2 / yr ¹
	245.1	22 - 26		1/yr ¹	 		Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr ¹	2 / yr ¹
Se 20	8.00	22 - 26	Quarterly ¹	1/yr ¹	 		Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹	2 / yr¹	2 / yr ¹	2 / yr ¹	2 / yr ¹

Metals - Total Recoverable							

				TABL	E G – C	DPHE SI	JRFACE	WATER I	MONITOR	ING PR	OGRAM				
Sampling Free Location	equencies is & Para		Pre Dis	charge		ent Plant luent	Performanc	e Monitoring	Ad Hoc Program					at Indiana	
Parameter or Method	Method	Total # Analyses Per Year All Sites	Pond A4 or Pond B5	Pond C2	Following	: Bldg 990 N. & S. Interceptors Prior to Equalizatio n Basin	Plume (footnote a)	Plume	Nitrate Study 8 Stations (footnote b)		nd Releases tnote c)		her Flow - I Release	Followir Events - Relea	
			SWA4 or SWB5	SWC2	INFL	990 INFL_N 990 INFL_S	SWB1, SWB2, SWB3, GS09	GS13	various	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck
(unfiltered)															
As	200.8	42 - 46	Quarterly ¹	1/yr ¹		Quarterly ¹	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹		2 / yr ¹
Be	200.8	42 - 46		1/yr ¹	· · /	Quarterly ¹	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹		2 / yr ¹
Cd	200.8	42 - 46	· · · · · · · · · · · · · · · · · · ·	1/yr ¹		Quarterly	Quarterly	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr¹	2 / yr ¹
Cr(VI) dslvd??	200.8	42 - 46	Quarterly	1/yr¹	Monthly ²	Quarterly	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr¹	2 / yr¹	2 / yr ¹	2 / yr ¹	2 / yr ¹
Fe	200.7	42 - 46		1/yr ¹		Quarterly ¹	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr¹	2 / yr ¹
Lithium	200.8	42 - 46		1/yr ¹		Quarterly ¹	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹		2 / yr ¹	2 / yr ¹	2 / yr ¹
Thallium	200.8	42 - 46	Quarterly ¹	1/yr ¹	Monthly ²	Quarterly ¹	Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr ¹	2 / yr ¹	2 / yr	2 / yr	2 / yr
Special TR Mo		iltered) For	STP Influer	nt - until d	omestic sev	wage contrib	utions are								
Ag	200.8	20			Monthly ²	Quarterly ¹									
Cu	200.7	20				Quarterly ¹									
Mn dslvd??	200.7	20				Quarterly ¹									
Ni	245.1	20				Quarterly									
Se	200.8	20			Monthly ²	Quarterly ¹									
Hardness as CaCO3	130.2	22-26	Quarterly ¹	1/yr ¹			Quarterly ¹	Quarterly ¹		Quarterly ¹	1/yr¹	2 / yr¹	2 / yr¹	2 / yr¹	2 / yr ¹
Organic Analyses															
VOCs	502.2	8					Semi- Annual ¹								

				TABL	E G – C	DPHE S	URFACE	WATER	MONITOR	RING PR	OGRAM				
Sampling Frequencies for Listed Pre Discharge Locations & Parameters					Treatm	ent Plant luent		e Monitoring					ng, Non-POC	Monitoring	g at Indiana
Parameter or Method	Method	Total # Analyses Per Year All Sites	Pond A4 or Pond B5	Pond C2	Bldg 995 Following Equalizati on Basin	Interceptors Prior to	Mound/ East Trenches Plume (footnote a)	Solar Pond Plume	Nitrate Study 8 Stations (footnote b)	(foo	nd Releases tnote c)	•	er Flow - No Release	Events -	ng Storm No Pond ase ^d
			SWA4 or SWB5	SWC2	INFL	990 INFL_N 990 INFL_S		GS13	various	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck	SW114 (GS03) Walnut Ck	SW001 (GS01) Woman Ck
Nutrients/Inor	ganics														
Ammonia as	350.2	52 - 56	10/yr ¹	1/yr ¹					Quarterly ¹	Quarterly ¹	1/yr ¹	2 / yr ¹	2 / yr ¹	2 / yr ¹	2 / yr ¹
Nitrite/Nitrate as N	353.2	52 - 56	10/yr ¹	1/yr ¹					Quarterly ¹	Quarterly ¹	1/yr ¹	2 / yr ¹	2 / yr ¹	2 / yr ¹	2 / yr ¹
Phosphate, T Orthophosph ate	365.1 365.2	20 - 24 20 - 24		1/yr ¹ 1/yr ¹						Quarterly ¹ Quarterly ¹		2 / yr ¹ 2 / yr ¹			
Solids, total suspended Chloride	160.1 325.3	40 - 44 5	10/yr ¹ Quarterly ¹	,	Monthly ¹	Quarterly ¹				Quarterly ¹	1/yr¹	2 / yr ¹			

a Metals and hardness monitoring will be conducted at GS09, below Pond B4. VOC monitoring will be conducted in Ponds B-1 and B-2 from the surface, and at the outfall from Ponds B-3 and below B-4 at GS09. VOC monitoring will be conducted in late fall
b Nitrate Special Study Stations: SW118, SW093, GS13, Pond A-4, GS10, EFFL, Pond B-5, SW114. Station EFFL


Grab

Sample

is the outfall from the STP.

^c Metals monitoring at Indiana Street "During Pond Releases", will be conducted for those pond discharges where metals monitoring was done for the Pre-Discharge sample.

d "Storm Event / No Pond Release" related monitoring may be conducted by the Site as part of it's Buffer Zone Hydrologic Monitoring Program. If not, the State will attempt to schedule grab sample collection.



	THOT QU	ARTER 2005	
Location	Sample Date Parameter	Analysis	*Analysis* Units 1st 2nd
Pre-Discharge	e Monitoring		
Pond A3			
	3/11/2005		
	Americium ²⁴¹	0.038 +/- 0.008 pCi	Л
	Gross Alpha	< 6 pCi	
	Gross Beta	13 +/- 6 pCi	
	Plutonium ²³⁹⁺²⁴⁰	< 0.011 pCi	
	Uranium, Total	2 ug/l	
	Arsenic, Total Recoverable	< 0.001 mg/	
	Beryllium, Total Recoverable	< 0.001 mg/	
	Cadmium, Total Recoverable	< 0.0006 mg/	/L
	Chromium, Total Recoverable	0.003 mg/	/L
	Copper, Dissolved	< 0.005 mg/	/L
	Iron, Total Recoverable	0.034 mg/	/L
	Lithium, Total Recoverable	0.026 mg/	/L
	Manganese, Dissolved	0.015 mg/	/L
	Nickel, Dissolved	< 0.03 mg/	/L
	Selenium, Dissolved	< 0.001 ug/l	L
	Silver, Dissolved	< 0.0005 mg/	L
	Thallium, Total Recoverable	< 0.001 mg/	
	Ammonia as N	< 30 ug/l	
	Chloride	470 mg/	
	Hardness as CaCO3	650 mg/	
	Nitrate/Nitrite	0.41 mg/	
	Orthophosphate	0.57 mg/	
	Phosphate, Total	0.83 mg/	
	Total Suspended Solids	20 mg/	'L
	3/30/2005		
	Ammonia as N	0.06 mg/	/L
	Chloride	460 mg/	′L
	Nitrate/Nitrite	< 0.3 mg	/L
Pond A-4			
	2/04/2005		
	Gross Alpha	< 6 pCi	/1
	Gross Beta	11 +/- 4 pCi	
	Uranium, Total	< 0.001 mg/	
	oraniam, rotal	1 0.001	_
Pond B-5			
1 0HQ D -0			
	3/07/2005		
	Americium ²⁴¹	0.051 +/- 0.009 pCi	
	Gross Alpha	< 6 pCi	
	Gross Beta	17 +/- 6 pCi	
	Plutonium ²³⁹⁺²⁴⁰	< 0.016 pCi	
	Uranium, Total	5 ug/l	
	Arsenic, Total Recoverable	< 0.001 mg/	
	Beryllium, Total Recoverable	< 0.001 mg/ < 0.0006 mg/	
	Cadmium, Total Recoverable	< 0.0006 mg/	L
	Character Tatal Bassaca II	. 01	Л
	Chromium, Total Recoverable	< 0.1 mg/	
	Copper, Dissolved	< 0.005 mg/	L


	Sample	e							*Analysis*
Location	Date	Parameter	Analy	sis				Units	1st 2nd
Location	Bate	Iron, Total Recoverable Lithium, Total Recoverable Manganese, Dissolved Nickel, Dissolved Selenium, Dissolved Silver, Dissolved Thallium, Total Recoverable Ammonia as N Chloride Hardness as CaCO3 Nitrate/Nitrite Orthophosphate Phosphate, Total	< < <	0.054 0.046 0.043 0.03 2.4 0.5 0.001 0.09 500 420 1.6 0.22 0.3			mg/L mg/L mg/L ug/L ug/L mg/L mg/L mg/L mg/L mg/L	Cincs	ist Ziid
		Total Suspended Solids		50			mg/L		
Creek Samplii	ng								
•	S								
South Walnut	Creek belo	ow Pond B-4 (GS09)							
	3/30/200								
		Americium ²⁴¹ Gross Alpha Gross Beta Plutonium ²³⁹⁺²⁴⁰ Uranium, Total Arsenic, Total Recoverable	< <	0.030 6 13 0.019 1 0.001	+/-	0.012 6 0.005	pCi/L pCi/L pCi/L pCi/L ug/L mg/L		
		Beryllium, Total Recoverable Cadmium, Total Recoverable Chromium, Total Recoverable Iron, Total Recoverable Lithium, Total Recoverable Thallium, Total Recoverable	<	0.002 0.0006 0.004 0.71 0.008 0.001			mg/L mg/L mg/L mg/L mg/L		
Walnut Creek	at Indiana	St. (SW114)							
	3/30/200	5							
		Sodium, Total Arsenic, Total Recoverable Beryllium, Total Recoverable Cadmium, Total Recoverable Chromium, Total Recoverable Copper, Dissolved Iron, Total Recoverable	< < <	230 0.001 0.001 0.0006 0.02 5 230			mg/L mg/L mg/L mg/L ug/L ug/L		
		Lithium, Total Recoverable Manganese, Dissolved Nickel, Dissolved Selenium, Dissolved Silver, Dissolved Thallium, Total Recoverable	< < <	0.034 30 0.03 1.0 0.5 0.001			mg/L ug/L mg/L ug/L ug/L mg/L		
		Ammonia as N Chloride Hardness as CaCO3 Nitrate/Nitrite	H_0	0.08 460 500 0.88			mg/L mg/L mg/L mg/L		

		FIRST QUA	AKIEN	2005				
	Sampl	e						*Analysis*
Location	Date	Parameter	Analy	sis			Units	1st 2nd
		Orthophosphate		0.09		mg/L		
		Phosphate, Total		0.27		mg/L		
		Total Suspended Solids		11		mg/L		
Woman Creek	x At Indian	a						
	3/30/200)5						
	2,20,200	Sodium, Total		53		mg/L		
		Arsenic, Total Recoverable	<	0.001		mg/L		
		Beryllium, Total Recoverable		0.002		mg/L		
		Cadmium, Total Recoverable	<	0.0006		mg/L		
		Chromium, Total Recoverable	<	0.02		mg/L		
		Copper, Dissolved	<	5		ug/L		
		Iron, Total Recoverable	<	10		ug/L		
		Lithium, Total Recoverable		0.010		mg/L		
		Manganese, Dissolved		4		ug/L		
		Nickel, Dissolved	<	0.03		mg/L		
		Selenium, Dissolved	<	1.0		ug/L		
		Silver, Dissolved	<	0.5		ug/L		
		Thallium, Total Recoverable	<	0.001		mg/L		
		Ammonia as N		0.05		mg/L		
		Chloride		110		mg/L		
		Hardness as CaCO3		230		mg/L		
		Nitrate/Nitrite	<	0.3		mg/L		
		Orthophosphate	<	0.02		mg/L		
		Phosphate, Total		0.014		mg/L		
		Total Suspended Solids	<	10		mg/L		
Walnut Creek	below Por	tal 3 (SW093)						
	3/30/200)5						
	3/30/200	Americium ²⁴¹	<	0.011		pCi/L		
				6		•		
		Gross Alpha Gross Beta	<	18	+/- 6	pCi/L pCi/L		
		Plutonium ²³⁹⁺²⁴⁰	_		+ /- 0	pCi/L		
		Uranium, Total	<	0.006 13		ug/L		
		Ammonia as N		0.07		mg/L		
		Chloride		660		•		
		Nitrate/Nitrite		0.50		mg/L mg/L		
		Miliale/Milile		0.50		IIIg/∟		
North Walnut	Creek abo	ve Pond A-1 (GS13)						
	3/30/200)5						
		Sodium, Total		300		mg/L		
		Arsenic, Total Recoverable	<	0.001		mg/L		
		Beryllium, Total Recoverable		0.002		mg/L		
		Cadmium, Total Recoverable	<	0.0006		mg/L		
		Chromium, Total Recoverable	<	0.02		mg/L		
		Copper Dissolved		E		, . ~ /I		
		Copper, Dissolved	<	5		ug/L		
		Iron, Total Recoverable	<	10		ug/L		
		Lithium, Total Recoverable		0.040		mg/L		
		Manganese, Dissolved		22		ug/L		
		Nickel, Dissolved	<	0.03		mg/L		

	Sample	*Analysis*					
Location	Date	Parameter	Analy	vsis .	Units	1st 2nd	
		Selenium, Dissolved	<	1.0	ug/L		
		Silver, Dissolved	<	0.5	ug/L		
		Thallium, Total Recoverable	<	0.001	mg/L		
		Ammonia as N		0.05	mg/L		
		Chloride		610	mg/L		
		Hardness as CaCO3		730	mg/L		
		Nitrate/Nitrite		46	mg/L		
		Orthophosphate	<	0.02	mg/L		
		Phosphate, Total		0.012	mg/L		
		Total Suspended Solids	<	10	mg/L		



	Sampl	e			*Analysis*		
Location Pond A3	Date	Parameter	Analysis Level	Units	1st 2nd		
	3/11/200)5					
		1-Hexanol, 2-ethyl	13.036	ug/L			
		Cyclotrisiloxane, hexamethyl	8.743	ug/L			
		Acetic acid, 2-ethylhexyl es	14.131	ug/L			



GLOSSARY

Ag silver Am americium

AOI analyte of interest

APCD Air Pollution Control Division AQCC Air Quality Control Commission

ALF action level framework

B found in blank Be beryllium

CAS chemical abstracts service number

Cd cadmium

CDPHE Colorado Department of Public Health and Environment

Cr chromium

D&D decontamination and decommissioning

DOE Department of Energy

EPA Environmental Protection Agency ESR Environmental Surveillance Report

H exceeds holding time
IMP Integrated Monitoring Plan

J detected but below practical quantitative limit

LARS Laboratory and Radiation Services

mg/L Milligram per liter

MCL Maximum Contaminant Level (below MCL is safe)

MDL minimum detection level

Nd not detected NO₃ nitrate

pCi/L picocuries per liter

pCi/m³ picocuries per cubic meter

PM particulate material ppb parts per billion ppm parts per million

PQL practical quantitative level

Pu plutonium

QNS quantity not sufficient

RFCA Rocky Flats Cleanup Agreement

RFETS Rocky Flats Environmental Technology Site

TLV ACGIH Threshold limit value TSP Total Suspended Particulate

TSS Total Suspended Solids


μg/L microgram per liter

μg/m³ micrograms per cubic meter

U uranium

VOCs volatile organic compounds

WQCC Water Quality Control Commission
WQCD Water Quality Control Division
WWTP wastewater treatment plan



If you have questions or comments about this report, or if you would like to be placed on the mailing or email list to receive copies of this report in the future, please write to:

Rocky Flats Program, Hazardous Material and Waste Management Division Colorado Department of Public Health and Environment 4300 Cherry Creek Drive South Denver, Colorado 80246-1530

Telephone (303) 692-3300

INTERNET ACCESS

Air Pollution Control Division

Email arch.crouse@state.co.us
World Wide Web <u>www.cdphe.state.co.us/ap/</u>

Email gordon.pierce@state.co.us

World Wide Web <u>www.cdphe.state.co.us/ap/</u>

Hazardous Materials & Waste Management Division

Email edgar.ethington@state.co.us

World Wide Web <u>www.cdphe.state.co.us/hm/</u>

Laboratory Services Division

Email tony.harrison@state.co.us

World Wide Web www.cdphe.state.co.us/lr/